


Project: LFC Shower Renovations Buildings 1 and 2

Addendum #1.

- 1) Sign-in sheet attached
- 2) Clarification bid is for 3 shower areas. Two in Building 1 (Apts. A &B)  
One in Building 2 (Apt. E)
- 3) Floor replacement will extend 9' (nine feet) out from back wall not 7' (seven feet)  
Wall replacement will remain as shown in original sketches. New sketches are attached showing revisions.

**CONSTRUCTION NOTES:**

- REMOVE ALL CERAMIC TILE AND BACKER BOARD WHERE INDICATED ON DRAWING.
- REMOVE ALL FLOOR TILE AND MUD SET MORTAR WHERE INDICATED ON DRAWING.
- ALL PLUMBING, WIRING, CEILING WORK AND REPAIR/REPLACEMENT OF METAL STUDS TO BE DONE BY AGENCY STAFF.
- ALLOW 10 DAYS BETWEEN DEMOLITION AND START OF NEW WORK FOR AGENCY STAFF TO ROUGH-IN PLUMBING AND REPAIR METAL STUDS AS NEEDED.
- PROVIDE 1/2" HARDY BOARD BACKER FOR WALL TILES.
- PLUMBING AND DRAIN WORK TO BE DONE BY OTHERS.
- PROVIDE MAPEI 4 or 1 MUD BED, PITCH FLOOR TO EXISTING DRAINS IN ALL DIRECTIONS.
- PROVIDE "HUMP" IN FLOOR UNDERLAMENT WHERE INDICATED IN DRAWINGS.
- PROVIDE LATICRETE 9235 WATERPROOF MEMBRANE 2 APPLICATIONS ON FLOORS.
- FLOOR UNDERLAMENT TO BE EXAMINED WITH PROJECT MANAGER BEFORE TILING TO ASSURE PITCH AND WATERPROOFING.
- PROVIDE LATICRETE HYDRO BAN ON WALLS.
- PROVIDE AMERICAN OLEAN MOSAIC 2X2 GROUP 3 ON FLOORS. AGENCY TO CHOOSE COLOR.
- PROVIDE AMERICAN OLEAN GLAZED 4 X 4 WALL TILE GROUP 1 ON WALLS.
- PROVIDE LATICRETE SPECTRA LOCK COMMERCIAL GROUT ON FLOORS AND WALLS.

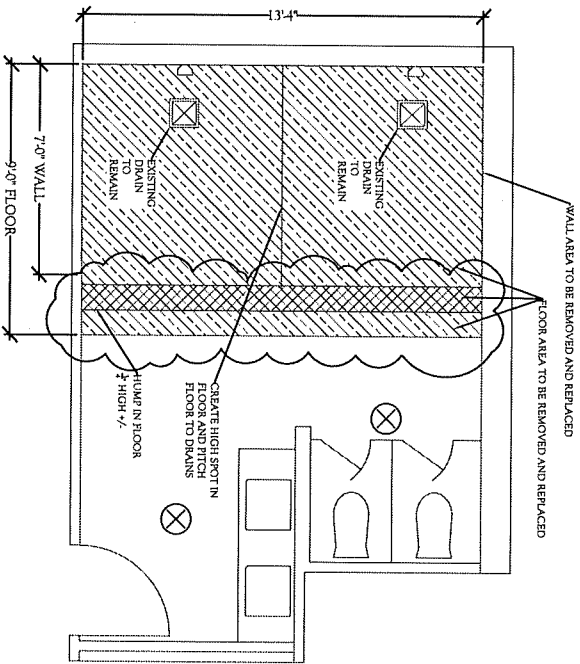

**BID 2 APTE**

**CONSTRUCTION NOTES:**

- REMOVE ALL CERAMIC TILE AND BACKER BOARD WHERE INDICATED ON DRAWING.
- REMOVE ALL FLOOR TILE AND MUD SET MORTAR WHERE INDICATED ON DRAWING.
- ALL PLUMBING, WIRING, CEILING WORK AND REPAIR/REPLACEMENT OF METAL STUDS TO BE DONE BY AGENCY STAFF.
- ALLOW 10 DAYS BETWEEN DEMOLITION AND START OF NEW WORK FOR AGENCY STAFF TO ROUGH-IN PLUMBING AND REPAIR METAL STUDS AS NEEDED.
- PROVIDE 1/2" HARDY BOARD BACKER FOR WALL TILES.
- PLUMBING AND DRAIN WORK TO BE DONE BY OTHERS.
- PROVIDE MAPEI 4 to 1 MUD BED, PITCH FLOOR TO EXISTING DRAINS IN ALL DIRECTIONS.
- PROVIDE "HUMP" IN FLOOR UNDERLAMENT WHERE INDICATED IN DRAWINGS.
- PROVIDE LATICRETE 9235 WATERPROOF MEMBRANE- 2 APPLICATIONS ON FLOORS.
- FLOOR UNDERLAMENT TO BE EXAMINED WITH PROJECT MANAGER BEFORE TILING TO ASSURE PITCH AND WATERPROOFING.
- PROVIDE LATICRETE HYDRO BAN ON WALLS.
- PROVIDE AMERICAN OLEAN MOSAIC 2X2 GROUP 3 ON FLOORS. AGENCY TO CHOOSE COLOR.
- PROVIDE AMERICAN OLEAN GLAZED 4 X 4 WALL TILE GROUP 1 ON WALLS.
- PROVIDE LATICRETE SPECTRA LOCK COMMERCIAL GROUT ON FLOORS AND WALLS.

