CONSTRUCTION NOTES:

REMOVE ALL CERAMIC TILE AND BACKER BOARD WHERE INDICATED ON DRAWING.

REMOVE ALL FLOOR TILE AND MUD SET MORTAR WHERE INDICATED ON DRAWING.

ALL PLUMBING, WIRING, CEILING WORK AND REPAIR/REPLACEMENT OF METAL STUDS TO BE DONE BY AGENCY STAFF.

ALLOW 10 DAYS BETWEEN DEMOLITION AND START OF NEW WORK FOR AGENCY STAFF TO ROUGH-IN PLUMBING AND REPAIR METAL STUDS AS NEEDED.

PROVIDE $\frac{1}{2}$ " HARDY BOARD BACKER FOR WALL TILES.

PLUMBING AND DRAIN WORK TO BE DONE BY OTHERS.

PROVIDE MAPEI 4 to 1 MUD BED, PITCH FLOOR TO EXISTING DRAINS IN ALL DIRECTIONS.

PROVIDE "HUMP" IN FLOOR UNDERLAYMENT WHERE INDICATED IN DRAWINGS.

PROVIDE LATICRETE 9235 WATERPROOF MEMBRANE- 2 APPLICATIONS ON FLOORS.


FLOOR UNDERLAYMENT TO BE EXAMINED WITH PROJECT MANAGER BEFORE TILLING TO ASSURE PITCH AND WATERPROOFING.

PROVIDE LATICRETE HYDRO BAN ON WALLS

PROVIDE AMERICAN OLEAN MOSAIC 2X2 GROUP 3 ON FLOORS. AGENCY TO CHOOSE COLOR.

PROVIDE AMERICAN OLEAN GLAZED 4 X 4 WALL TILE GROUP 1 ON WALLS.

PROVIDE LATICRETE SPECTRA LOCK COMMERCIAL GROUT ON FLOORS AND WALLS.

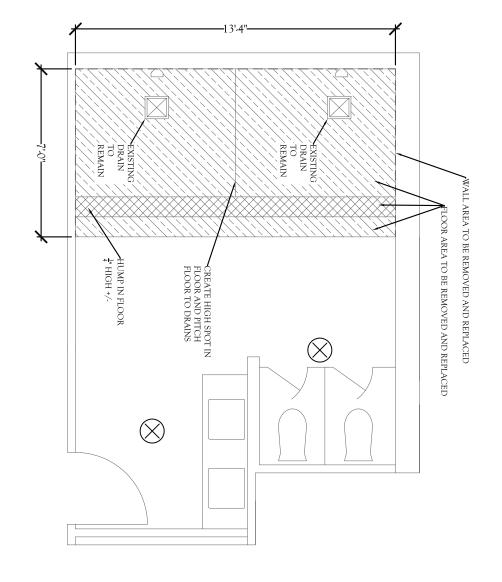

BLD 2 APT E

